HTBP - PRESET PRESSURE DOWN HOLE BURST PUP



A NEW INNOVATION IN DOWN HOLE SAFETY

The patented Hiltap Burst Pup Tubing Drain is a pressure activated safety device which has a larger window opening than other similar devices and is custom designed for each application.

INCREASES THE SAFETY OF ANY WELL SITE

With an engineered window set to activate at various selected pressures (+/- 100 PSI), this product increases the reliability of any well site.

By maintaining the integrity of the well, the Burst Pup is able to save costs previously resulting from unwanted pressure releases, over pressurized equipment and well downtime.

HILTAP FITTINGS LTD.

© Copyright OPW-ES 10/2013

2726 Henkle Dr. | Lebanon, OH | 45036
T: 1-800-547-9393 | F: 513-932-9845
www.opw-es.com

OPW® Engineered Systems
PART OF OPW FLUID TRANSFER GROUP
A DOVER COMPANY


HTBP - PRESET PRESSURE DOWN HOLE BURST PUP



Intact | Mechanically Retained | Full Open

FEATURES & BENEFITS

- Threaded ends for easy installation. Pin x Box, Pin x Pin, Box x Box. Threads are available in 8 rd., Super Max, Hydril, etc. or a combination of either.
- Larger window for quicker, more efficient pipe blocking and can be manufactured to separate completely, or be mechanically retained at the top to ensure trouble free pump or tool removal.
- Color coded window for pressure identification
- Bolder design for more torsional load and resistant to premature cycling pressure ruptures
- Retreated window to prevent premature failure due to rod or tubing friction.
- Traceable ID for verification
- Built to API thread specifications
- Built to ISO 9001, current edition

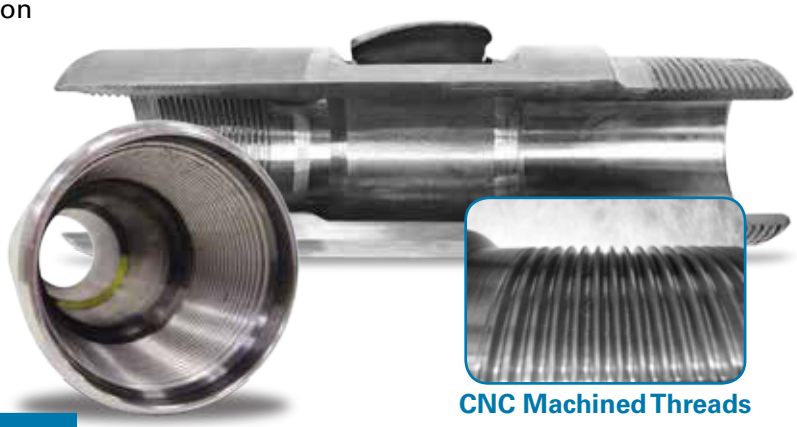

CNC Machined Threads

The burst window is recessed internally and externally to prevent contact with other well components

AVAILABLE SIZES		RELIEF OPENING	
2.375"	6.0 cm	2.82 sq in	18.19 sq cm
2.875"	7.3 cm	2.86 sq in	18.45 sq cm
3.500"	8.9 cm	5.03 sq in	32.45 sq cm
4.500"	11.4 cm	5.65 sq in	36.45 sq cm
5.000"	12.7 cm	6.22 sq in	40.13 sq cm
5.500"	13.9 cm	7.16 sq in	46.19 sq cm

FEATURES & BENEFITS

As per requested specification
Safe, Environmentally friendly, Quality products.
Patented, Patents pending.

ARMOUR VALVE

Distributed by Armour Valve

Phone: 1-800-268-3508

Email: sales@armourvalve.com

Website: armourvalve.com

2726 Henkle Dr. | Lebanon, OH | 45036
T: 1-800-547-9393 | F: 513-932-9845
www.opw-es.com

OPW® Engineered Systems
PART OF OPW FLUID TRANSFER GROUP
A DOVER COMPANY